

TAU SECURITY SYSTEM

Security system and monitoring software
- hybrid system that receives data from
Radio, IP and Mobile

TRANSMITTER

Radio - Radina Tau U4
Radina Tau V5
Radina U2
Radina V3

IP - IP Tau

Mobile - GPRS Tau
GPRS TauL
INB Tau
INB L

RADIO RECEIVER

Radina H3322

IP/MOBILE SERVER

Server Tau

MONITORING SOFTWARE

RadinaSoft
IPNOVA SMS

Main features


- Power supply 12VDC (8,5V to 16V)
- Low power consumption
- Capability to use communicator as input - using "Ademco Contact ID" protocol
- Five digital inputs – fully compatible with "Ademco Contact ID" Protocol – programmable Event Code, Partition and Zone
- Configurable working mode for every digital input:
Normal Open, Normal Close, Check for AC voltage from 5V to 20V, Deactivated



GPRS TauL

GPRS transmitter

TRANSMIT DATA FROM SECURITY
PANELS AND SENSORS BY GPRS
BASED NETWORK

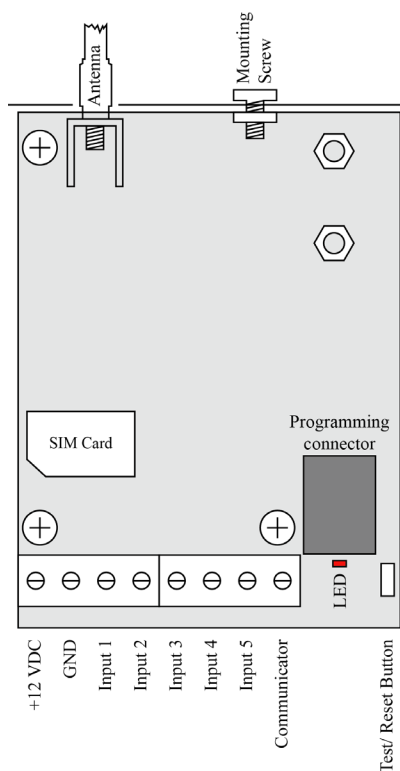

GPRS interface

- Capability to use one or two fully independent servers – each with main and backup IP/Domain Name address
- Encrypted connection with the servers
- Programmable connection test period – range between 1 to 65535 seconds
- Capability to enter PIN or PUK code for the SIM card
- Graphical display of the status of the mobile network
- SMS report of the status of the communicator and/or digital inputs to up to 5 mobile numbers
- Capability each digital input separately to be set to transmit SMS report