

TAU SECURITY SYSTEM

Security system and monitoring software
- hybrid system that receives data from
Radio, IP and Mobile

TRANSMITTER

Radio - Radina Tau U4
Radina Tau V5
Radina U2
Radina V3

IP - IP Tau

Mobile - GPRS Tau
GPRS TauL
INB Tau
INB L

RADIO RECEIVER

Radina H3322

IP/MOBILE SERVER


Server Tau

MONITORING SOFTWARE

RadinaSoft
IPNOVA SMS

Main features


- Power supply 12VDC (8,5V to 16V)
- Low power consumption
- Capability to use communicator as input - using "Ademco Contact ID" protocol
- Six digital inputs working simultaneously with GPRS and/or IP transmitters
- Configurable working mode for every digital input:
Normal Open, Normal Close, Check for AC voltage from 5V to 20V, Deactivated
- HTML server for easy configuration and status check, protected with an username and a password
- HTML server for easy configuration without the need of specialized software for programming - using only a web browser (Internet Explorer, Google Chrome, Firefox etc.)

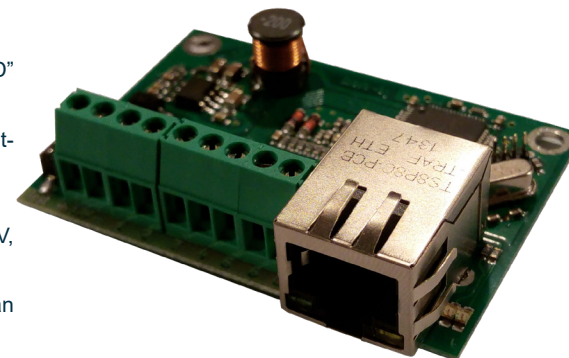

IP Tau

IP transmitter

TRANSMIT DATA FROM SECURITY
PANELS AND SENSORS BY IP
BASED NETWORK

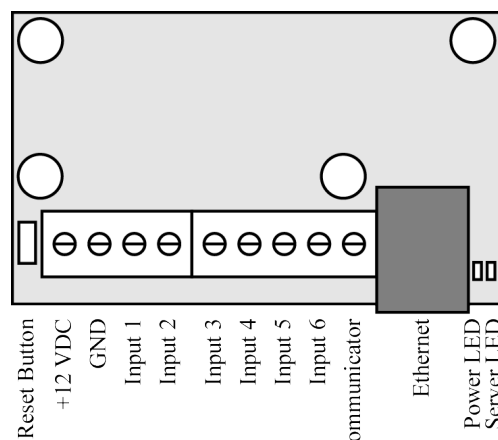

IP interface

- IEEE 802.3 Ethernet, Fully Compatible with 10/100/1000Base-T Networks
- Static or dynamic IP address compatible with DHCP server
- Capability to use one or two fully independent IP servers
- Encrypted connection with IP servers
- Verification with an unique ID code
- Indication (4 LEDs) for:
 - Power Supply
 - LAN Status - Ethernet available
 - LAN Activity – Network packets service
 - Server LED – Established connection with IP server/s – when using 1 server - 'ON' when connection is established. When using 2 servers - 'ON' when connection is established with both servers, blinks if connection is established with only one server, 'OFF' when connection isn't established with both servers
- Capability to change the username and password of the html server